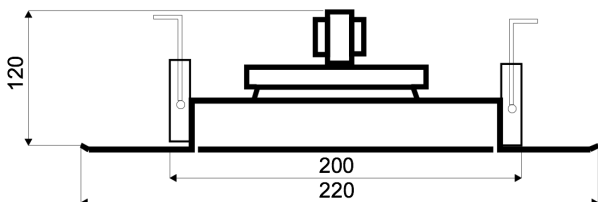


DLS-220F-II-30W

Ceiling-Speaker

in Metal with 30 Watt Power and 2-Way - Technology

**TECHNICAL DATA****DLS-220F-II-30W**

Loudspeaker:	165 mm - 2-Way-System
Power-Consumption:	100V-30-20-10-6-3W
Frequency-Range:	70-18 000 Hz
SPL 1W/1M:	95 dB
SPL 30W/1M:	103 dB
SPL 1W/1M max.:	106 dB (3,2 kHz)
SPL 30W/1M max.:	114 dB (3,2 kHz)
Radiation:	180° (1,5 kHz)
Dimension:	220 mm x 120 mm
Ceiling Cut-out:	200 mm
Suitable slab thickness:	1 mm - 35 mm
Weight:	1,5 g
Material:	Metal
Color:	RAL 9010 / opt. RAL Classic

- Two-part design via bayonet mounting
- Five touch-secure 100V-tappings
- Ball-attack protection according DIN 18032-3 optional
- Optional firedome & In-wall/concrete-dome obtainable
- Custom colors and wet-room version by request
- 6/10/20W & 8 Ohm-Versions optional
- Ceramic clamp & thermal fuse by request