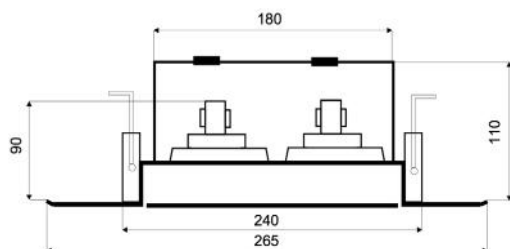


DLS-265-AB

Ceiling-Speaker

in Metal with 2x 6 Watt Power for AB - Systems

**TECHNICAL DATA****DLS-265-AB**

Loudspeaker:	2x 165 x 70 mm - broadband
Power-Consumption:	2x 100V-6-3-1,5W
Frequency-Range:	70-20 000 Hz
SPL 1W/1M max.:	92 dB (double)
SPL 6W/1M max.:	100 dB (double)
Radiation H/V:	180°/180° (bis 1,6 kHz, double)
Dimension:	265 x 90 mm
Ceiling Cut-out:	240 mm
Suitable slab thickness:	1 mm - 35 mm
Weight:	2,0 kg
Material:	Metal
Color:	RAL 9010 / opt. RAL Classic

- Two autonomous loudspeaker/100V-transformer per system
- Enables operation of speaker via two discrete cable-lines
- In case of failure of one line, continuous function of the second line
- Two-part design via bayonet mounting
- Custom colors and wet-room version by request
- Touch-secure 100V-tappings via WAGO clamps
- Ball-attack protection according DIN 18032-3 optional
- Firedome & In-Wall/Concrete dome optional
- Optional 10W Version available
- Ceramic clamp & thermal fuse by request