


DLS-265F

Ceiling-Speaker
in Metal with 6 Watt Power

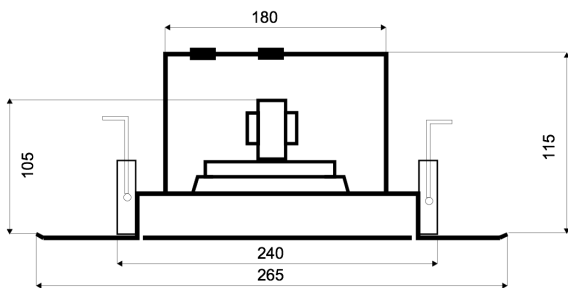

TECHNICAL DATA

DLS-265F

Loudspeaker:	8" - broadband with HF-Cone
Power-Consumption:	100V-6-3-1,5W 100V-10-5-2,5W optional
Frequency-Range:	70-19 000 Hz
SPL 1W/1M:	98 dB
SPL 6W/1M:	106 dB
SPL 1W/1M max.:	105 dB (3,8 kHz)
SPL 6W/1M max.:	113 dB (3,8 kHz)
Radiation:	180° (1,4 kHz)
Dimension:	265 mm x 105 mm
Mountin depth in flat version:	65 mm
Ceiling Cut-out:	240 mm
Suitable slab thickness:	1 mm - 35 mm
Weight:	1,5 kg
Material:	Metal
Color:	RAL 9010 / opt. RAL Classic

- Two-part design via bayonet mounting
- Three touch-secure 100V-tappings
- Ball-attack protection according DIN 18032-3 optional
- Optional firedome & In-wall/concrete-dome obtainable
- Custom colors and wet-room version by request
- Flat version by request
- 2-Way & 10W & 8 Ohm-Versions optional
- Ceramic clamp & thermal fuse by request