
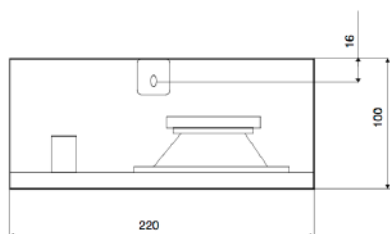



RG-220F

Wall / On-Ceiling - Speaker
in Metal with 6 Watt Power

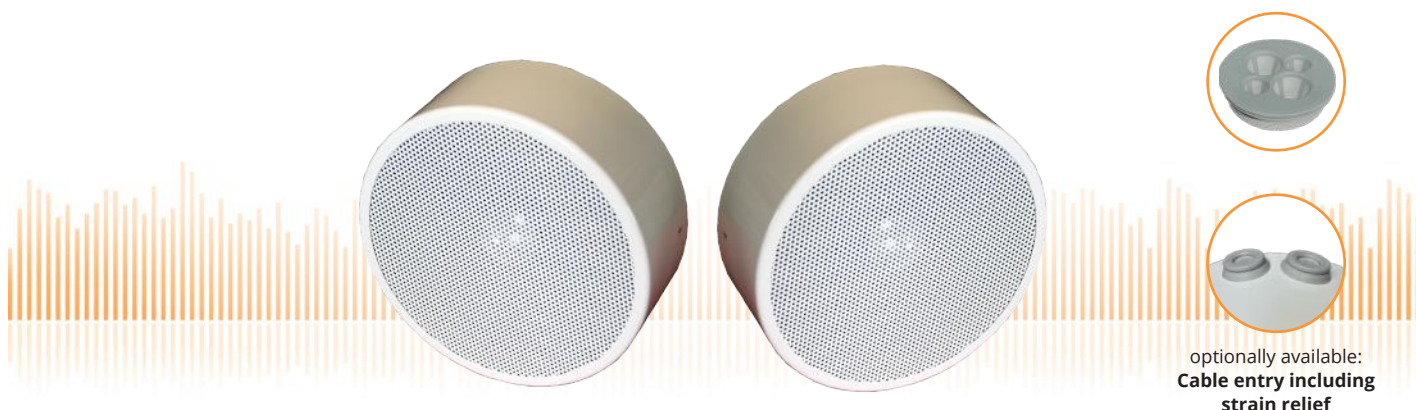

TECHNICAL DATA

RG-220F

Loudspeaker:	8" - broadband with HF-cone
Power-Consumption:	100V-6-3-1,5W
Frequency-Range:	70-18 000 Hz
SPL max 1W/1M:	98 dB
SPL max 6W/1M:	106 dB
SPL 1W/1M max.:	106 dB (3,2 kHz)
SPL 6W/1M max.:	114 dB (3,2 kHz)
Radiation:	180° (1,5 kHz)
Dimension:	220 x 100 mm
Weight:	1,4 kg
Material:	Metal
Color:	RAL 9010 / opt. RAL Classic

- Ball-attack certified version acc. to DIN 18032-3 optional
- Theft-protected mounting bracket and screws
- Three touch-secure 100V-tappings
- Custom sizes & custom colors optional
- 2-Way version & 10W version available
- Wetroom/Damproom version in ALU/ALU obtainable
- Ceramic clamp & thermal fuse by request
- Optional cable entry including strain relief available
- Optional multiple entry can be used if necessary