


SLB-220F

Ceiling-Speaker
in Metal with 10 Watt Power

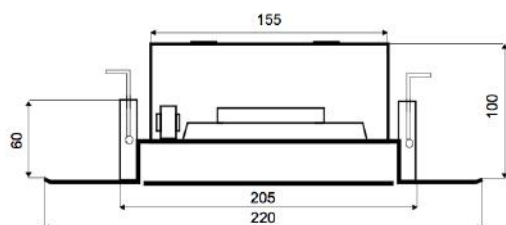

TECHNICAL DATA

SLB-220F

Loudspeaker:	6,5" - broadband
Power-Consumption:	100V-10-6-3-1,5W
Frequency-Range:	90-18 000 Hz
SPL 1W/1M:	93 dB
SPL 10W/1M:	103 dB
Radiation:	180° (bis 1,6 kHz)
Dimension:	220 mm x 60 mm
Mounting depth with firedome:	FLAT: 65 mm, Standard: 100mm
Ceiling Cut-out:	205 mm
Suitable slab thickness:	1 mm - 30 mm
Weight:	ca. 1,1 kg without firedome
Material:	Metal
Color:	RAL 9010

- Full metal
- Two-part design via bayonet mounting
- Only 60mm mounting depth without firedome
- Only 100mm mounting depth with optional firedome
- Usable as 100V-10-6-3W or 100V-6-3-1,5W
- Four touch-secure 100V-tappings
- Custom colors and firedome optional
- Ball-attack protection according DIN 18032-3 optional
- Ceramic clamp & thermal fuse by request