
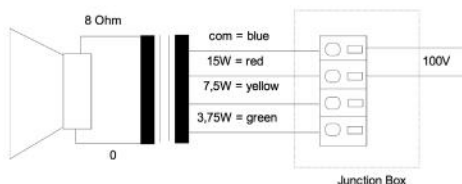




VOICE-15T/EN5424

EN 54-24 Horn-Speaker for Outdoor Use
in ABS / SS with 15 Watt Power

EN
54-24

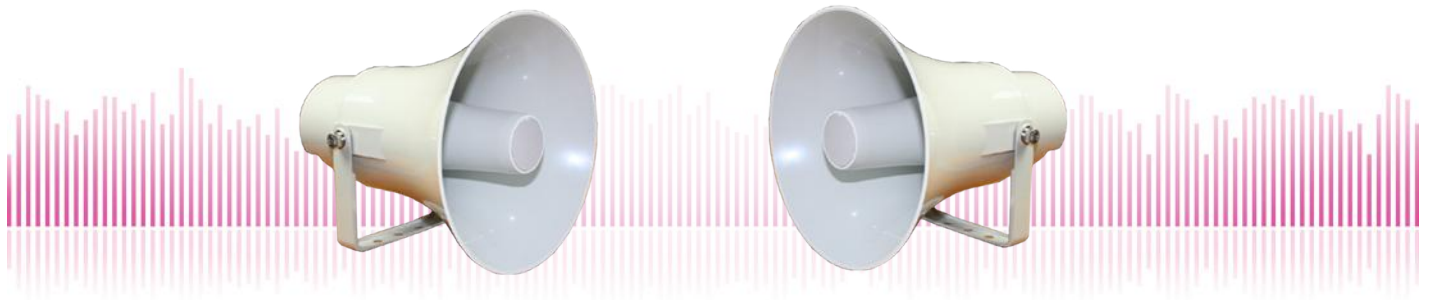

TECHNICAL DATA

VOICE-15T/EN5424





Loudspeaker:	Horn-paging
Power-Consumption:	100V-15-7,5-3,75W
Frequency-Range:	320-8 000 Hz
EN-Sensitivity 1W/4M:	85,73 dB
SPL max 15W/4M:	103,8 dB
SPL 1W/1M max. EASE/Ulysses:	111 dB (2,1 kHz)
SPL 15W/1M max. EASE/Ulysses:	123 dB (2,1 kHz)
Radiation H (0,5/1/2/4KHz):	180°/110°/45°/18°
Radiation V (0,5/1/2/4KHz):	180°/110°/45°/18°
EN degree:	EN Type B, weather-proof, outdoor-certificated
Dimension:	200 mm x 235 mm
Weight:	1,3 kg
Material:	ABS
Color:	white
Certificate-Nr.:	1293-CPR-0626
Order-Nr.:	VOICE-15T/EN5424

- Stainless Steel screws
- Weather-proof & dust-proof according to IP 66
- Weather-resistant ABS-case
- Three 100V-tappings with junction box
- Special DIN 912-ISO 4762 screws
- Ceramic clamp & thermal fuse by request

VOICE-15T/EN5424

EN 54-24 Horn-Speaker for Outdoor Use
in ABS / SS with 15 Watt Power

Radiation

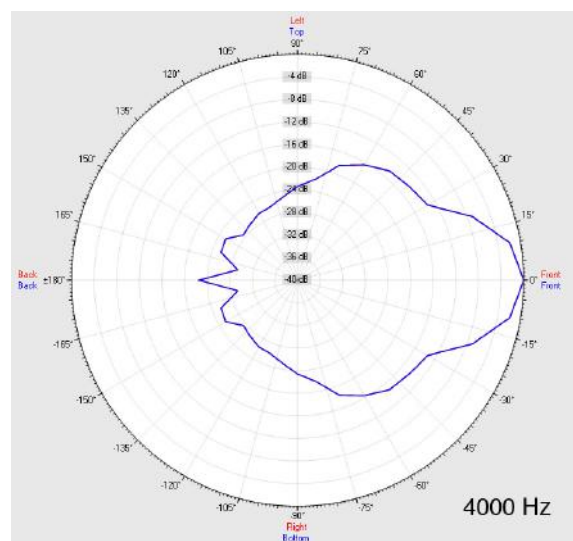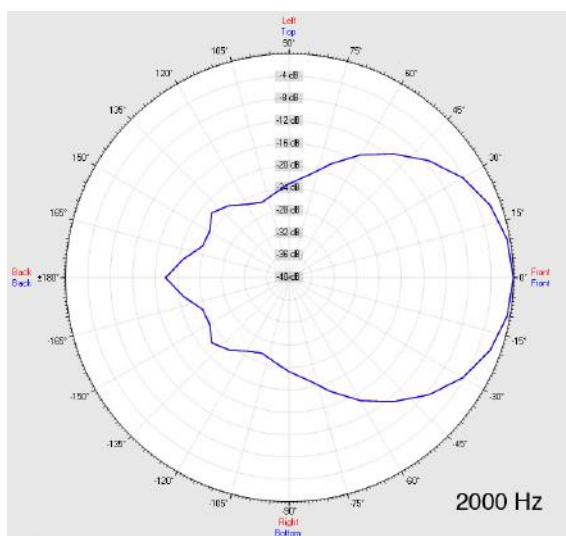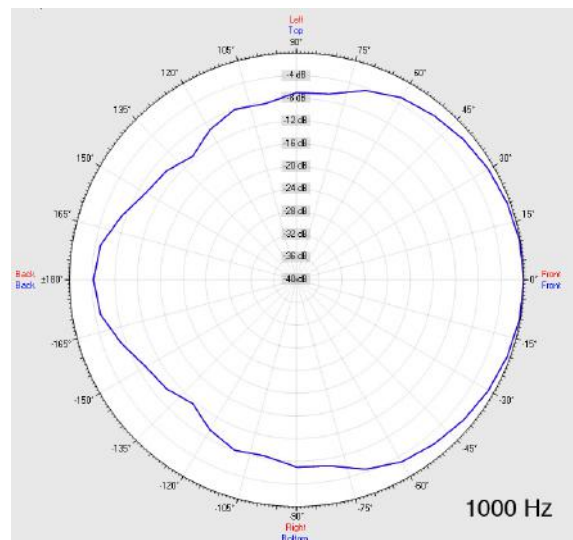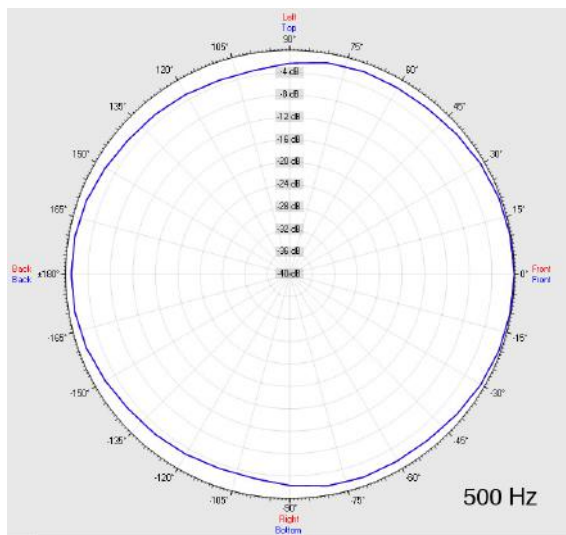


Test method	Axis	500 Hz	1000 Hz	2000 Hz	4000 Hz
EN 54-24	HOR	180°	110°	45°	18°
EN 54-24	VER	180°	110°	45°	18°
EASE/Ulysses	HOR	360°	150°	75°	40°
EASE/Ulysses	VER	360°	150°	75°	40°

VOICE-15T/EN5424

EN 54-24 Horn-Speaker for Outdoor Use
in ABS / SS with 15 Watt Power

Isobar-Diagramm

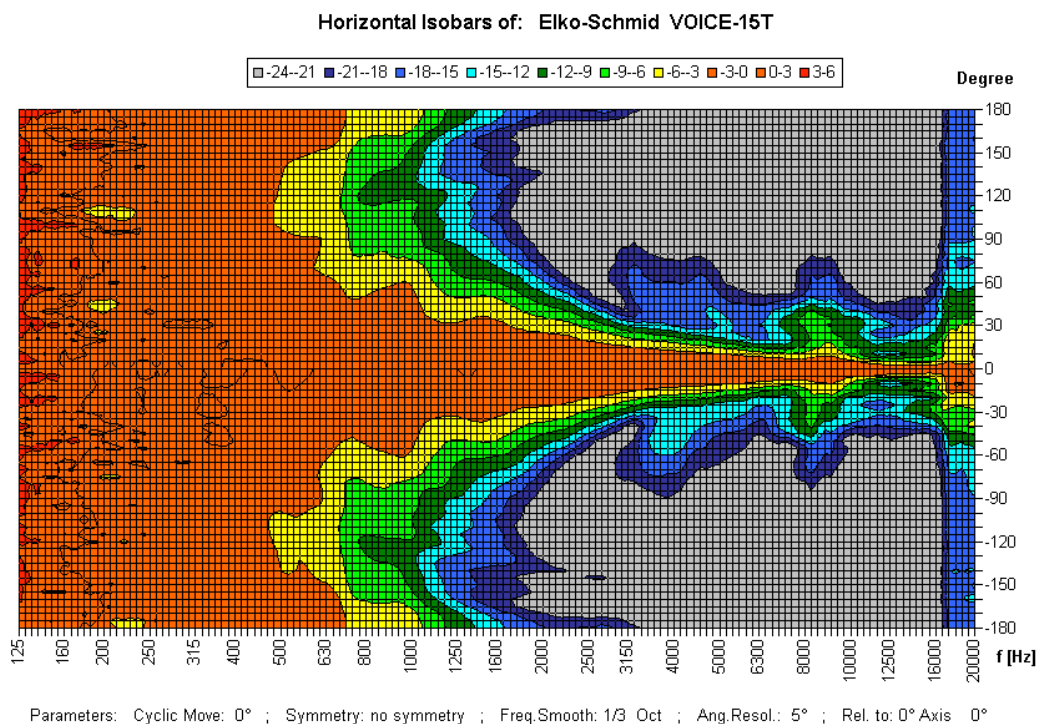**CE**

1293

Elko Schmid GmbH & Co. KG
Glauchauer Str. 30, D-08058 Zwickau

11

DoP: 498058129314-OWS-PN-0023

EN 54-24

Loudspeaker for voice alarm systems for
fire detection and fire alarm systems for buildings

VOICE-15T/EN5424

Intended Option:
Type B