


WHL-250G

Wall / On-Ceiling - Speaker
in MDF with 6 Watt Power

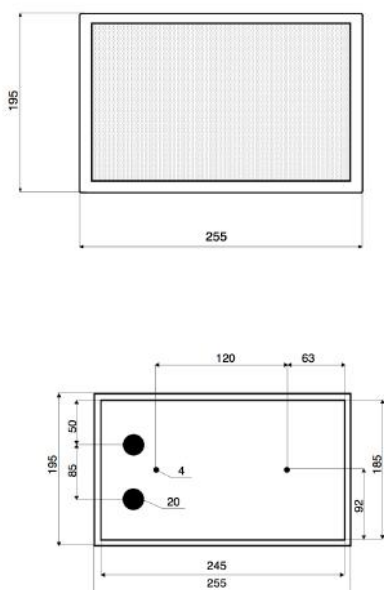

TECHNICAL DATA

WHL-250G

Loudspeaker:	165 mm - broadband
Power-Consumption:	100V-6-3-1,5W
Frequency-Range:	80-17 000 Hz
SPL 1W/1M:	96 dB
SPL 6W/1M:	104 dB
SPL 1W/1M max.:	98,5 dB (1,8 kHz)
SPL 6W/1M max.:	106,5 dB (1,8 kHz)
Radiation:	160° (1 kHz)
Dimension:	255 x 195 x 85 mm
Weight:	1,8 kg
Material:	MDF / Metal-Grill
Color:	white

- Mounting through Quick-Snap-Real-Panel / Safety-Screws
- New Loudspeaker- and Transformer-System from DLS-220F
- Three touch-secure 100V-tappings
- Volume-control & 24V relay with installation optional
- Ceramic clamp & thermal fuse by request
- Optional multiple entry including strain relief available