
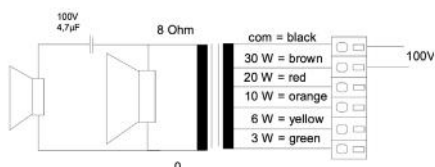




WHL-250G-II-30W/EN5424

EN 54-24 Wall / On-Ceiling - Speaker
in MDF with 30 Watt Power and 2-Way - Technology

EN
54-24

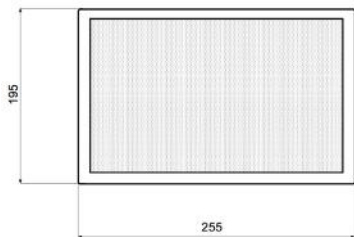

TECHNICAL DATA

WHL-250G-II-30W/EN5424





Loudspeaker:	6,5" - 2-Way-System
Power-Consumption:	100V-30-20-10-6-3W
Frequency-Range:	80-20 000 Hz
EN-Sensitivity 1W/4M:	80 dB
SPL max 30W/4M:	95 dB
SPL 1W/1M max. EASE/Ulysses:	102,5 dB (3,2 kHz)
SPL 30W/1M max. EASE/Ulysses:	115,5 dB (3,2 kHz)
Radiation H (0,5/1/2/4KHz):	180°/92°/122°/60°
Radiation V (0,5/1/2/4KHz):	180°/180°/112°/54°
Dimension:	255 x 195 x 85 mm
Weight:	ca. 2,1 kg
Material:	MDF / Metal-Grill
Color:	white
Certificate-Nr.:	1293-CPR-0496
Order-Nr.:	WHL-250G-II-30W/EN5424

- Mounting through Quick-Snap-Real-Panel / Safety-Screws
- New Loudspeaker- and Transformer-System from CLB-220-II-30W
- Five Touch-secure 100V-tappings
- Ceramic clamp & thermal fuse by request
- Optional multiple entry including strain relief available

WHL-250G-II-30W/EN5424

EN 54-24 Wall / On-Ceiling - Speaker
in MDF with 30 Watt Power and 2-Way - Technology

Radiation

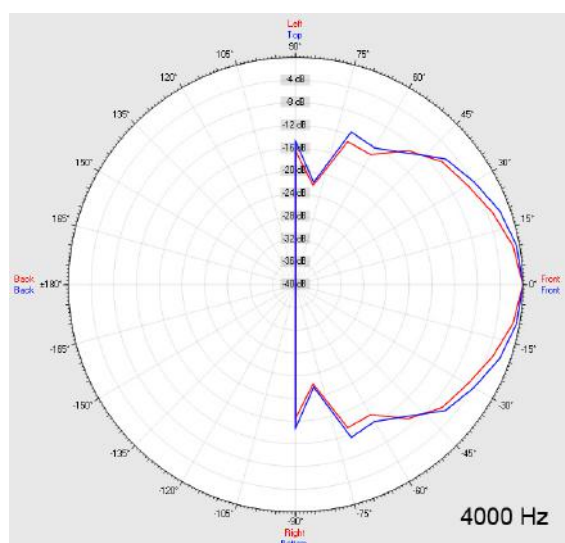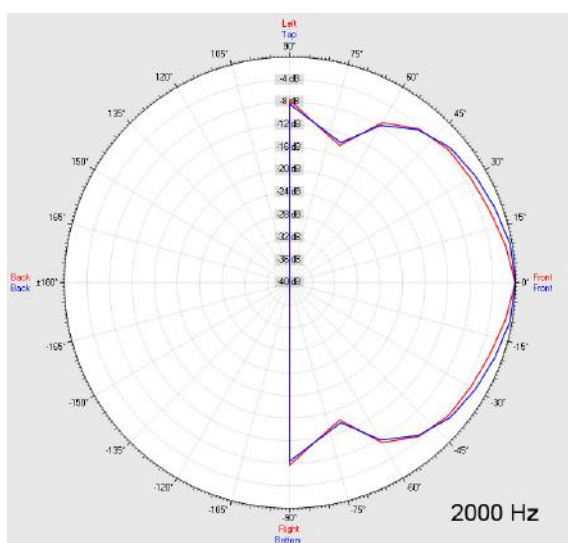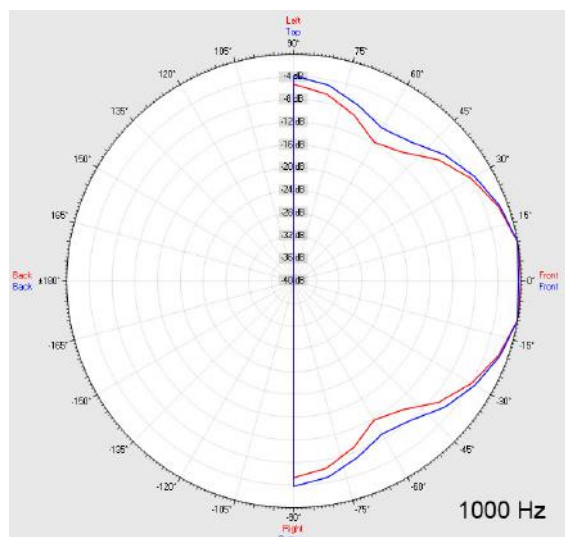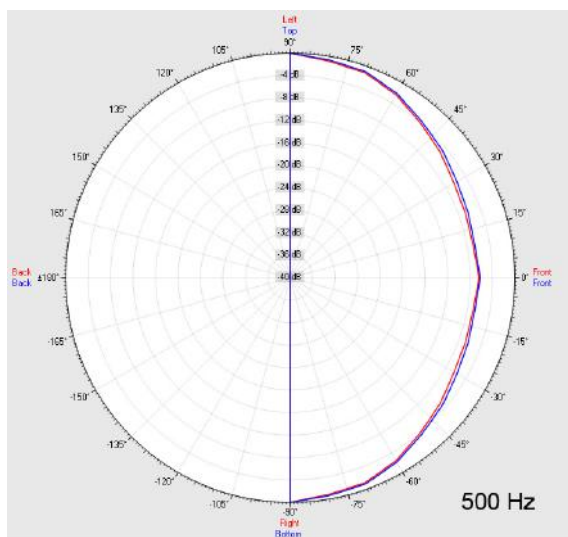

Test method	Axis	500 Hz	1000 Hz	2000 Hz	4000 Hz
EN 54-24	HOR	180°	92°	122°	60°
EN 54-24	VER	180°	180°	112°	54°
EASE/Ulysses	HOR	180°	80°	110°	80°
EASE/Ulysses	VER	180°	90°	110°	80°



WHL-250G-II-30W/EN5424

EN 54-24 Wall / On-Ceiling - Speaker
in MDF with 30 Watt Power and 2-Way - Technology



Elektroakustische Komponenten

Isobar-Diagramm

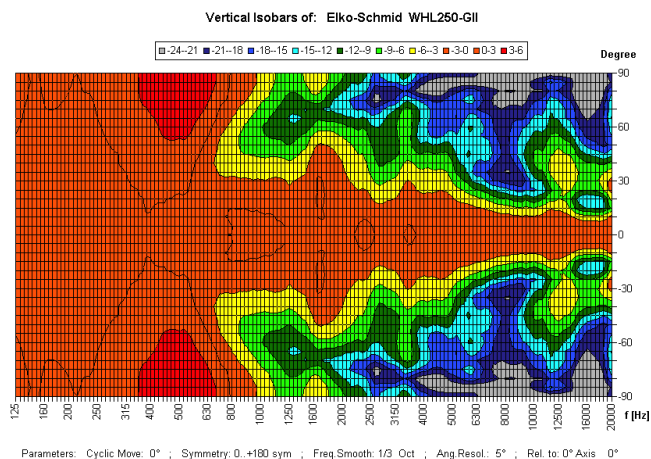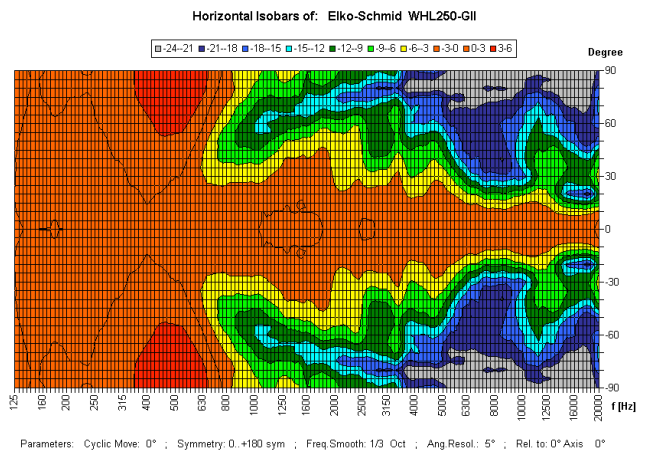

CE

1293

Elko Schmid GmbH & Co. KG
Glauchauer Str. 30, D-08058 Zwickau

15

DoP: 498058129314-OWS-PN-0025

EN 54-24

Loudspeaker for voice alarm systems for
fire detection and fire alarm systems for buildings

WHL-250G-II-30W/EN5424

Intended Option:
Type A