
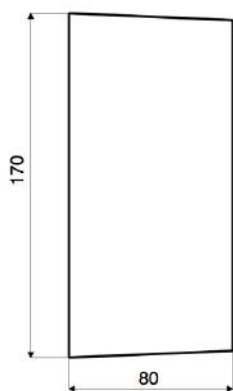


# WLA-230G

Wall / On-Ceiling - Speaker  
in ABS with 6 Watt Power

**ELKO  
SCHMID** 

Elektroakustische Komponenten

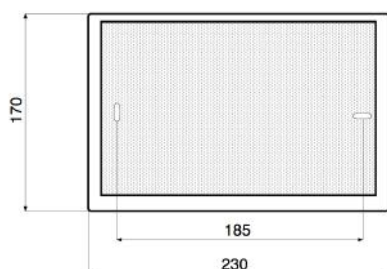

## TECHNICAL DATA

## WLA-230G

Loudspeaker:	120 mm - broadband
Power-Consumption:	100V-6-3-1,5W
Frequency-Range:	80-15 000 Hz
SPL 1W/1M:	93 dB (97dB/1 kHz)
SPL 6W/1M:	101 dB (105dB/1,5 kHz)
Radiation:	180° (1kHz)
Dimension:	230 x 170 x 80 mm
Weight:	1,2 kg
Material:	ABS
Color:	white

- Easy mounting through Quick-Snap-Rear-Panel
- Only two drilling-points for the whole loudspeaker
- Flame retardant ABS material
- Three touch-secure 100V-tappings
- Wetroom-version with ALU-grill and impregnation obtainable
- 2-Way version and custom colors optional
- Back wall optional
- Volume control & 24V relay with installation optional
- Ceramic clamp & thermal fuse by request
- Optional multiple entry including strain relief available