
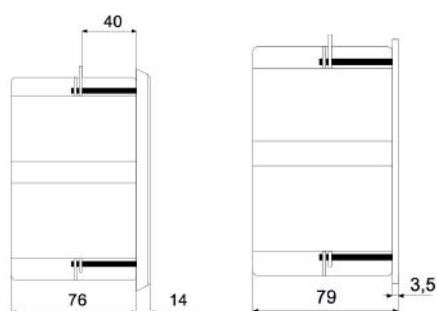



# WUL-270G-10W

In-Wall / Ceiling-Speaker  
in ABS with 10 Watt Power

**TECHNICAL DATA****WUL-270G-10W**

Loudspeaker:	130 mm - broadband with HF-Cone
Power-Consumption:	100V-10-5-2,5W
Frequency-Range:	70-17 000 Hz
SPL 1W/1M max.:	94 dB
SPL 10W/1M max.:	104 dB
Radiation:	180° (1kHz)
Dimension:	270 x 181 x 79 mm
Wall-cutout for hollow-space-mounting:	234 x 149 mm
Weight:	1,4 kg
Material:	ABS / Metal-Grill
Color:	white

- Suitable for Hollow-space- & In-Wall-Mounting
- Hollow-Space-Cabinet included
- Mounting like usual Hollow-Space-Boxes via four screws
- Loudspeaker-baffle mounted via two screws
- Very fast mounting through Quick-Snap-Front-Grill
- Flame retardent ABS material
- auch als 6W Version lieferbar
- 6W version available
- Volume control & 24V relay with installation obtainable
- Ceramic clamp & thermal fuse by request