
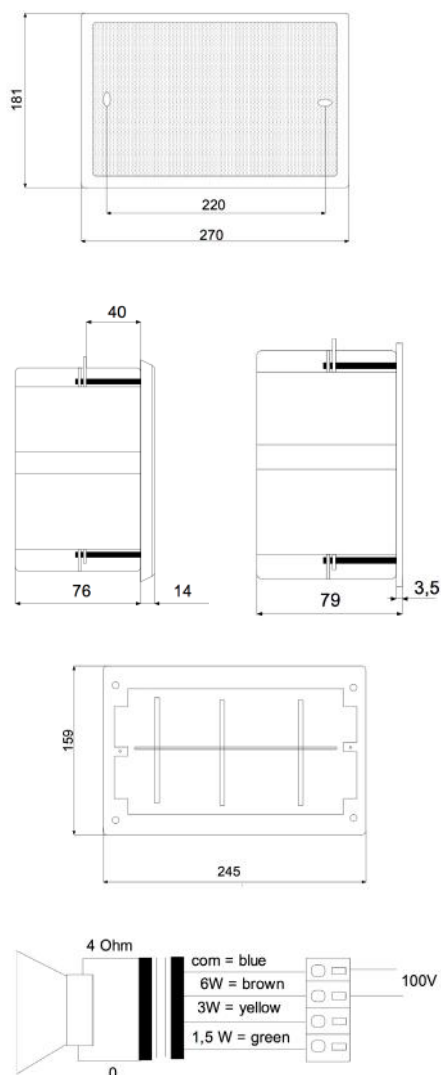


WUL 270 G/EN5424

EN 54-24 In-Wall / Ceiling-Speaker
in ABS with 6 Watt Power

EN
54-24

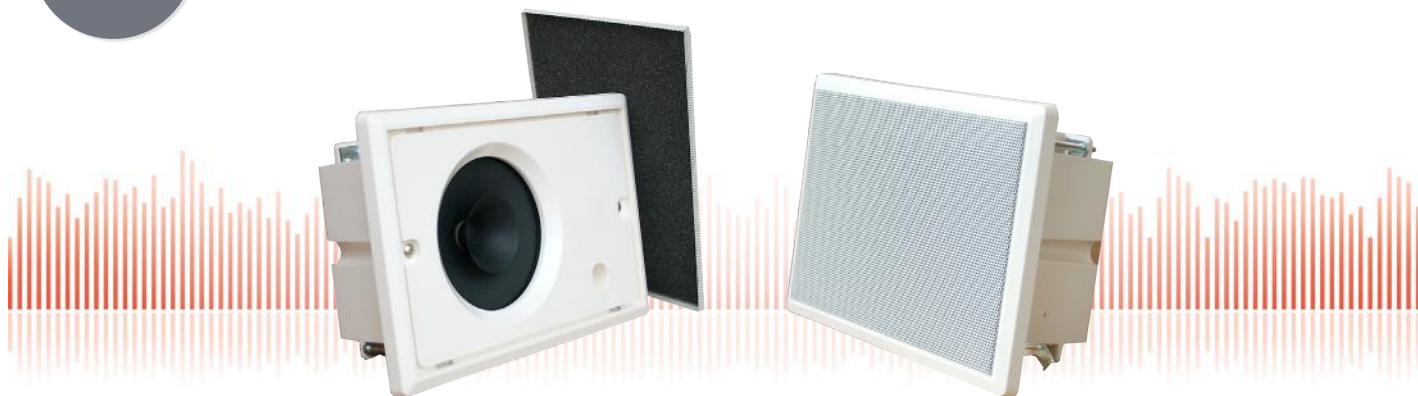

TECHNICAL DATA

WUL 270 G/EN5424





Loudspeaker:	130mm - broadband with HF-Cone
Power-Consumption:	100V-6-3-1,5W
Frequency-Range:	70-17 000 Hz
EN-Sensitivity 1W/4M:	79 dB
SPL max 6W/4M:	87 dB
SPL 1W/1M max. EASE/Ulysses:	100 dB (2,5 kHz)
SPL 6W/1M max. EASE/Ulysses:	106 dB (2,5 kHz)
Radiation H (0,5/1/2/4KHz):	180°/180°/129°/54°
Radiation V (0,5/1/2/4KHz):	180°/180°/85°/50°
Dimension:	270 x 181 x 79 mm
Wall-cutout for hollow-space-mounting:	234 x 149 mm
Weight:	1,3 kg
Material:	ABS / Metal-grill
Color:	white
Certificate-Nr.:	1293-CPD-0303
Order-Nr.:	WUL 270 G/EN5424

- Suitable for Hollow-space- & In-Wall-Mounting
- Hollow-Space-Cabinet included
- Mounting like usual Hollow-Space-Boxes via four screws
- Loudspeaker-baffle mounted via two screws
- Very fast mounting through Quick-Snap-Front-Grill
- Flame retardent material acc. to EN 60695-11-20, 5VB
- Wetroom-version with ALU-grill obtainable
- Ceramic clamp & thermal fuse by request

WUL 270 G/EN5424

EN 54-24 In-Wall / Ceiling-Speaker
in ABS with 6 Watt Power

Radiation

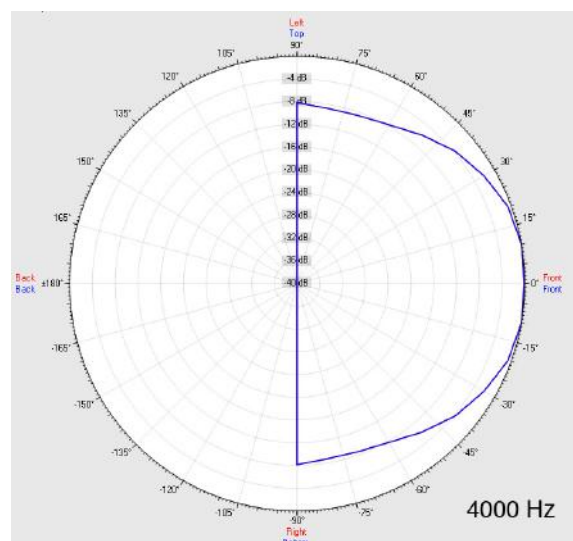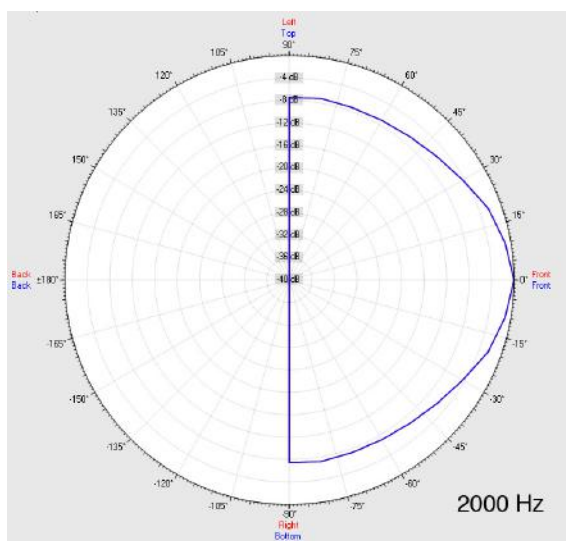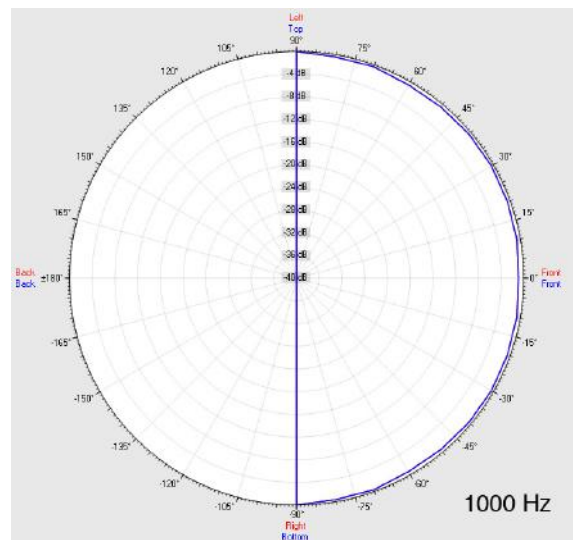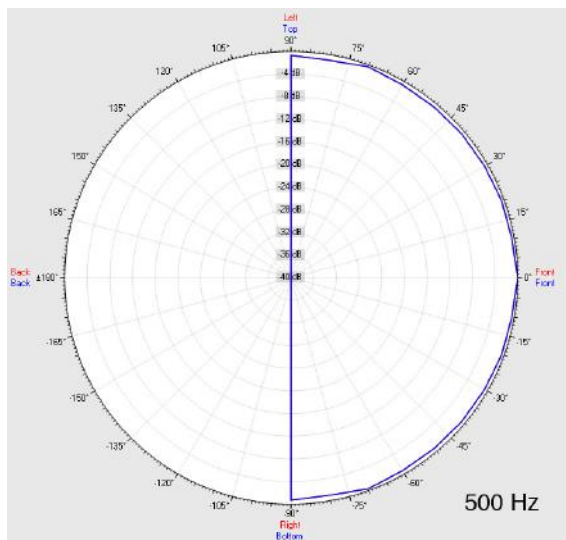


Test method	Axis	500 Hz	1000 Hz	2000 Hz	4000 Hz
EN 54-24	HOR	180°	180°	129°	54°
EN 54-24	VER	180°	180°	85°	50°
EASE/Ulysses	HOR	180°	180°	75°	100°
EASE/Ulysses	VER	180°	180°	75°	100°

WUL 270 G/EN5424

EN 54-24 In-Wall / Ceiling-Speaker
in ABS with 6 Watt Power

Isobar-Diagramm

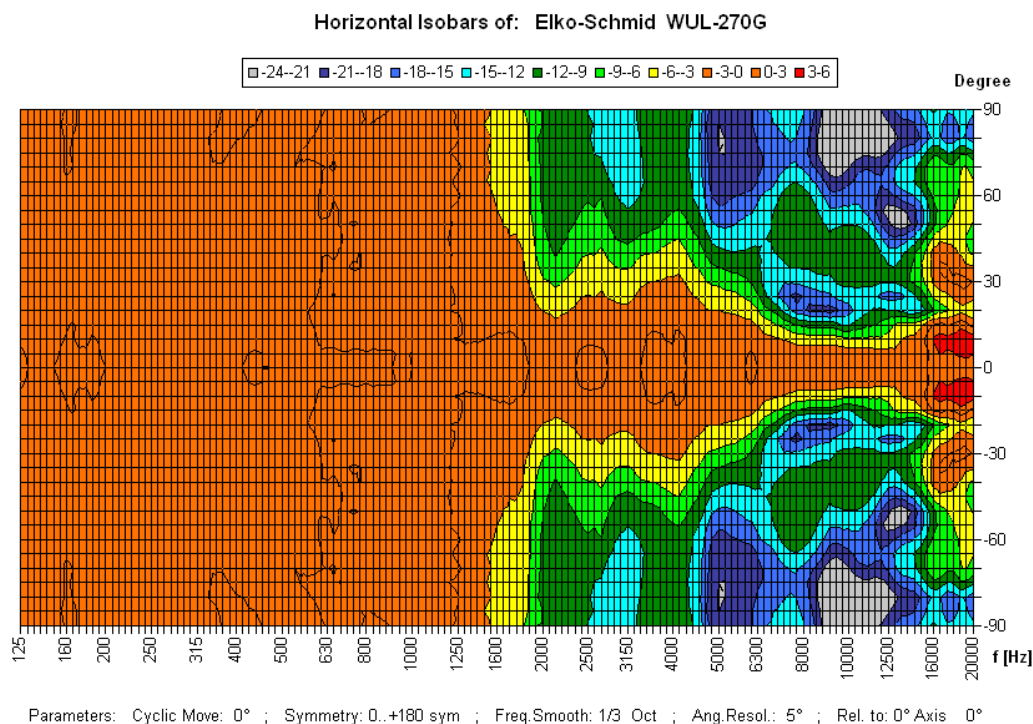**CE**

1293

Elko Schmid GmbH & Co. KG
Glauchauer Str. 30, D-08058 Zwickau

12

DoP: 498058129314-ICS-PN-0016

EN 54-24

Loudspeaker for voice alarm systems for
fire detection and fire alarm systems for buildings

WUL 270 G/EN5424

Intended Option:
Type A