



S
L
B

240
A/B

FLAT

EN
5424

10W

240
MM

A / B

H
A
U
T
P
A
R
L
E
U
R

2

L
I
G
N
E
S


- SEULEMENT **240MM DIAMETRE EXTERIEUR** AVEC DEUX SYSTEMES OVALES 165-MM
- PROFONDEUR ENCASTREMENT **AVEC CAPOT ANTIFEU** SEULEMENT **68-MM**
- **DEUX HAUT-PARLEURS** INDEPENDANTS & TRANSFO 100-V-PAR SYSTEME
- HAUT-PARLEUR APPROVISIONNE PAR **DEUX LIGNES SEPARÉES**
- 50-HZ-TRANSFO STABLE POUR **10W & 6W** REGLAGE PUISSANCE (**100V-10-6-3-1,5W**)
- HAUT-PARLEUR DE HAUTE **QUALITE IDENTIQUE** AVEC **WLA-230-AB**
- VERSION EN-5424 **CERTIFIEE ANTICHOC** NORME **DIN 18032-3** EN OPTION
- VERSION AVEC **BORNIER CERAMIQUE** ET **THERMO-FUSIBLE** LIVRABLE EN OPTION
- **VERSION SLB-240-AB-FLAT-10W/EN-5424-AVEC CAPOT ANTIFEU CERTIFIEE:**
NUMERO COMMANDE:

SLB-240-AB-FLAT-10W/EN-5424

NR-CERTIFICAT: 1293-CPR-0425

CARACTÉRISTIQUES TECHNIQUES: SLB-240-AB-FLAT-10W/EN5424

Haut-parleurs:	2 x 15W 165 x 70-mm-Fullrange
Ligne 100V:	2 x 100V-10-6-3-1,5W
Bande passante:	120 – 20.000 Hz
EN-Sensibilité 1W/4M:	71 dB (single) / 77 dB (double)
Pression acoustique max 10W/4M:	83 dB (single) / 89 dB (double)
Pression acoustique 1W/1M max EASE/Ulysses:	95 dB (3 KHz)
Pression acoustique 10W/1M max EASE/Ulysses:	102 dB (3 KHz)
Angle d'ouverture H (0,5/1/2/4 KHz):	180°/180°/170°/89° (single)
Angle d'ouverture V (0,5/1/2/4 KHz):	180°/180°/170°/89° (single)
Dimensions:	240 x 68-MM
Encastrément:	220 mm
Poids:	1,7 kg avec FLAT-capot
Matériel:	Métal
Couleur:	RAL 9010

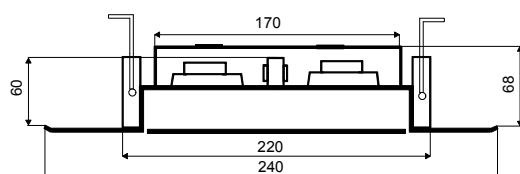


ANGLE D'OUVERTURE SLB-240-AB-FLAT-10-6-3-1,5W/EN5424 240-MM x 68-MM HP

Proc. de mesure	Axe	500Hz	1000Hz	2000Hz	4000Hz
EN5424	HOR	180°	180°	170°	89°
EN5424	VER	180°	180°	170°	89°
EASE/ULYSSES	HOR	180°	180°	80°	70°
EASE/ULYSSES	VER	180°	180°	85°	35°

Source Data: D:\nsch\Neko-Schmid\SLB240\AB\Flat\AS-ROB\Dummy.P02 Copyright by Four-Audio GmbH & Co KG Licensed to AAC


Horizontal Isobars of: Elko-Schmid SLB-240-AB double

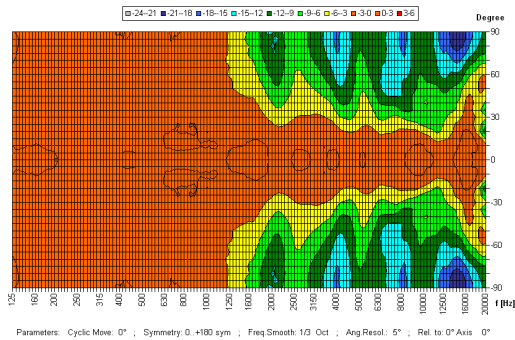





Parameters: Cyclic Move: 0° ; Symmetry: 0. +180 sym ; Freq Smooth: 1/3 Oct ; Ang Resol: 5° ; Rel. to 0° Axis: 0°

Source Data: D:\nsch\Neko-Schmid\SLB240\AB\Flat\AS-VER\Dummy.P02 Copyright by Four-Audio GmbH & Co KG Licensed to AAC

Vertical Isobars of: Elko-Schmid SLB-240-AB double

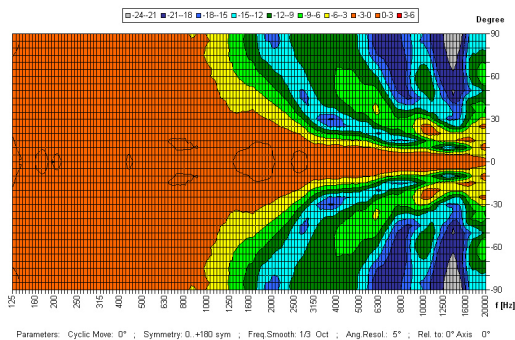

Parameters: Cyclic Move: 0° ; Symmetry: 0. +180 sym ; Freq Smooth: 1/3 Oct ; Ang Resol: 5° ; Rel. to 0° Axis: 0°

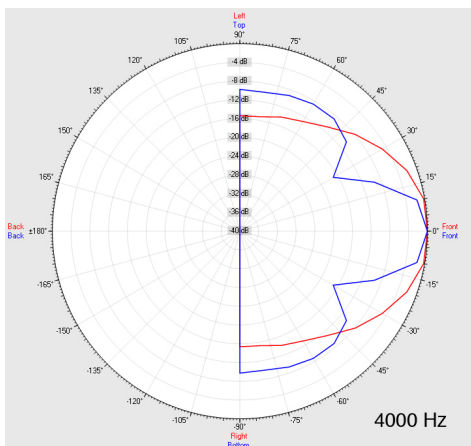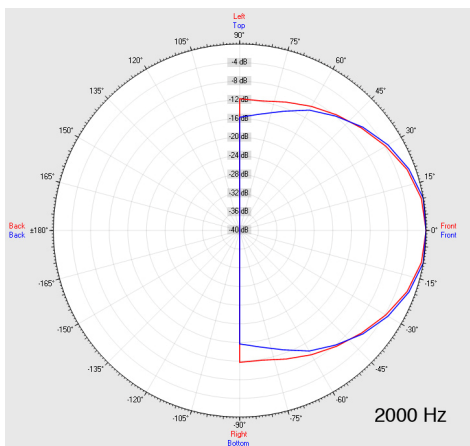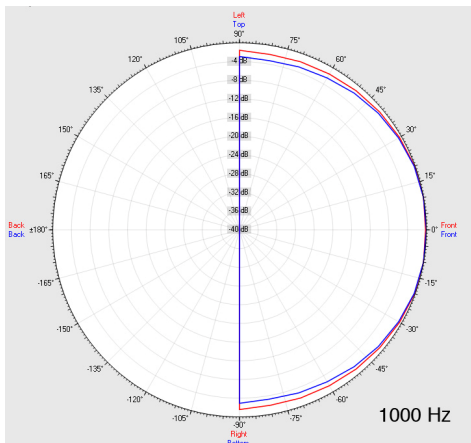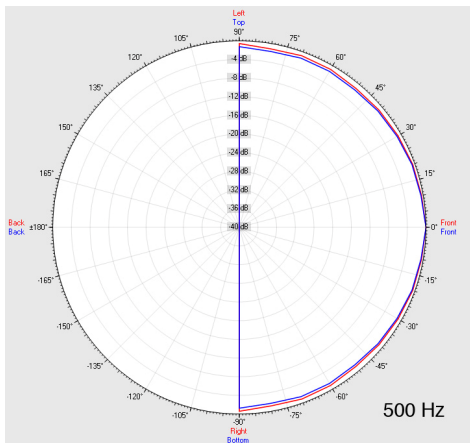

S
L
B

240
A/B

FLAT

EN
5424

10W

240
MM

A / B

H
A
U
T
P
A
R
L
E
U
R

2

L
I
G
N
E
S